


# L-3 SLIDE GATE OPERATOR



**RESIDENTIAL AND COMMERCIAL**  
CLASS I, II, III, & IV VEHICULAR SLIDE GATE OPERATOR

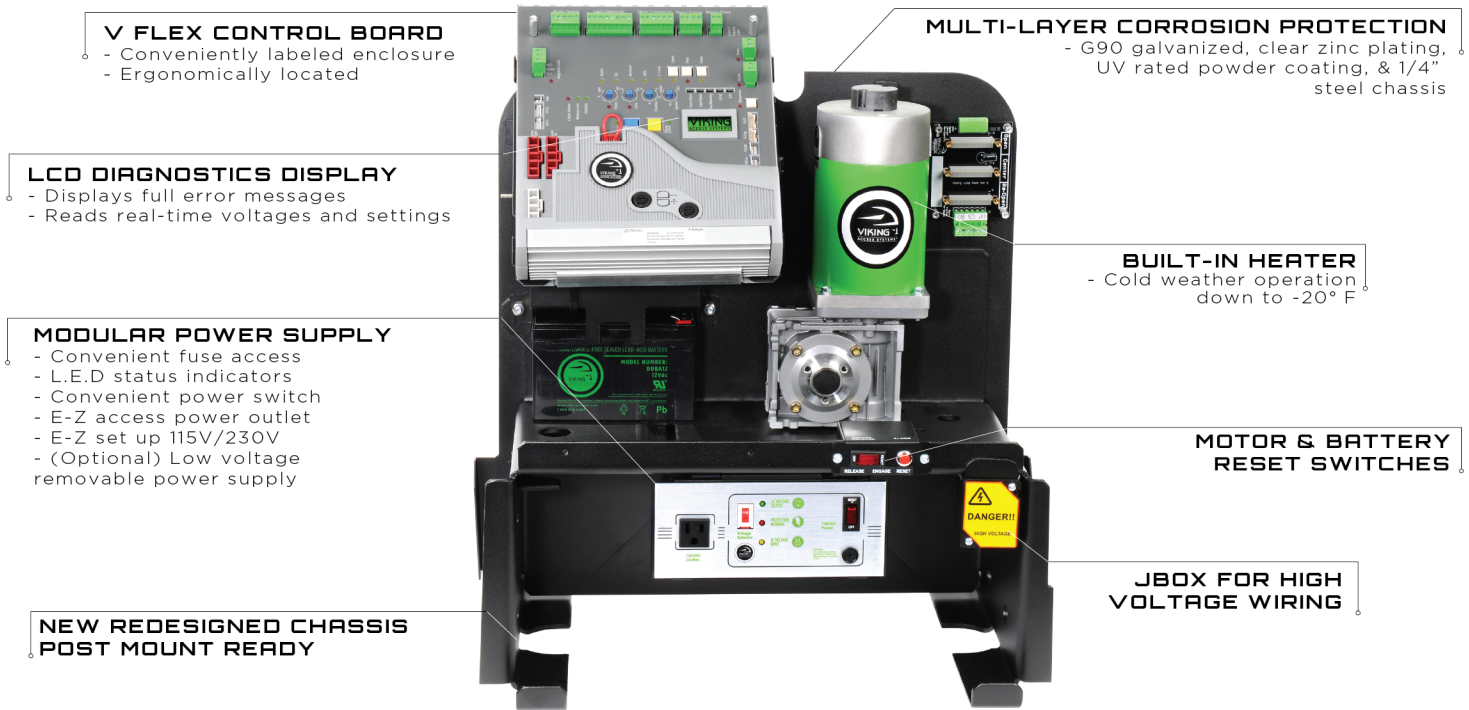

**COMPATIBLE WITH VIKING WIRELESS PRODUCTS**

- Wireless Master/Slave Kit provides secure and reliable wireless communication.
- Remote access to the control board settings, programming, operator diagnostics, controls, gate status and error notifications, all from the convenience of a computer or any compatible hand held device.
- Plug & Play connection for the Viking wireless expansion products.

**BATTERY BACKUP INCLUDED**

- Standard Battery Backup provides 100 continuous cycles at 100% duty cycle.
- With Viking's "True" Battery Backup System, batteries are not used during normal operations, maximizing battery life.

**LIGHTNING PROTECTION**

- Advanced lightning strike protection up to 20,000 volts / 10,000 amps
- On-board surge protection monitoring.

**DIGITAL LIMITS**

- Simple, push button limit setup.
- Adaptive Digital Limit control maintains open and close limit position during changing environments and power failures.

**INTEGRATED HEATER**

- Built-in heater for operating temperatures down to -20° F.
- This will allow you run your operator in the coldest conditions.

**SOLAR SMART**

- Power Saving technology minimizes current draw while at standby.

**DIAGNOSTICS DISPLAY**

- On-board LCD screen displays voltages, amps, gate status and diagnostics.

|                                  |                                    |
|----------------------------------|------------------------------------|
| <b>Operational Voltage</b>       | 24 VDC with 1/2 HP Motor           |
| <b>Main Power Source Options</b> | 120/240 VAC Single Phase           |
| <b>Battery</b>                   | 7 AmpHr 12 VDC x 2                 |
| <b>Battery Backup</b>            | 100 Full Contin. Cycles (1600 lbs) |

|                              |                    |
|------------------------------|--------------------|
| <b>Operating Speed</b>       | 12" per Second     |
| <b>Operating Temperature</b> | -20°F up to +160°F |
| <b>Max Gate Capacity</b>     | 1600 lbs/ 60'      |
| <b>Max Duty Cycle</b>        | 100% Contin. Cycle |